
## Install Method


### Drawing the position of mounting holes

 According to the installation position, put the mounting plate with one hand gently holding in the place which the unit will be installed. Then use the other hand to draw the positions of mounting holes in pencil or draw them directly according to the size.




### Drilling holes

 In accordance with the drawn holes position, drill four holes 6 mm in diameter and press the expansion pipes into four holes location.




### Fixing the mounting plate

 Direct the installation holes of the installation panel at the expansion pipes and fix them with self- threading cross screws.




### Installing the unit

The mounting plate has protrudent hooks formed for down the unit until the anti-theft screw holes on unit and mounting plate are aligned.



### Fixing anti-theft screws

- Screw anti-theft bolts in the bolt holes to fix the unit on the mounting plate.
- Install the air intake grill in the unit and make sure the grill is locked.




# Test Run


		Steps	Confirm information	Check & Notice
-	1	Shake the unit gently	The unit is installed firmly without shaking	It will occur shaking and noisy when the unit doesn't install firmly
	2	Confirm the power and voltage	Please use the rated voltage	It will burn out unit or cause human accidents if the power use incorrect
	3	Switch on the power	Close external power supply switch or insert the power plugs	Power socket must be match the unit plug please check the power when the indicator light not bright
	4	Slid in your hands to drying	High speed wind blow out	Please confirm whether your hands are far away from the sensor parts if there is no wind blowing out

# Daily Use and Maintenance

#### External Maintenance

- Screw with a soft dry cloth or towel Sassafras. Please use neutral detergent. Please don't use organic solvents, acid or alkali toilet cleaner, cleaning brush etc.
- Otherwise, the unit will destroy unit surface finish or produce discoloration.
- If using a chemical cloth, make sure that the use of attention.



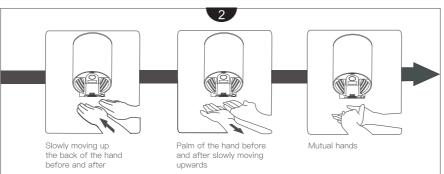

# Mini Hand Dryer

# **User Manual**



### Specifications

Dimensions	153x162x280 mm
N.W	3.4kg

Rated Voltage	AC220-240V	Motor	Brush Motor
Phase	Single-phase	Sensing Distance	15-20cm
Input Power	1150-1350W	Waterproof	IP13
Heating Power	650-750W	Air Speed	68 m/s

### WARNING



 Do not let children hanging on the unit. Otherwise, this may be risk of falling.



If you don't use this unit properly or follow the safety guidelines carefully, it would lead Warning to serious personal injury or property damage

\_\_\_\_\_

. Do not open the front panel. Otherwise, it may cause electric shock risk.



Do not splash water. Otherwise, it may cause electric shock risk.

Do not use inplaces where water is directly splashed or in places where it is prone to freezing. Otherwise, this may cause electric shock and unit malfunction.

\_\_\_\_\_\_



Prohibit

 Do not reform and perform unnecessary disassembling. Otherwise, it may cause fire, electric shock and injury accidents.



Rated power is required.



• If power tolerance is over +/-10%, there will be breakdown. If using incorrect power supply, fire, electric shock and machine malfunction will happen.



Ask your installer for advice.

- If used in combination with other appliances, it may cause abnormal heat in the shunt outlet.
- with instruction . Power must be turn off during maintenance to prevent the risk of electric shock. Air filter must be installed.
  - If the unit doesn't work or have abnormal conditions, please turn off power to prevent accidents; and close leakage circuit breaker and ask supplier to check and repair, or it may lead to fire because of electricity leakage and short circuit.
  - Unit must have reliable ground connection.
  - Attention when installation: Do not install when the unit are power connected.
  - This appliance is not intended for use by persons(including children) with reduced physical, sensory lack of experience and knowledge, unless they hosaypema bebeniletitaniel gs.joyer n supervision or instruction concerning use of the appliance by a person responsible for their safety.

• For additional protection, the installation of a residual current device (RCD) having a rated residual operating current not exceeding 30mA is advisable in the electrical circuit supplying the bathroom.

• If the cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.




 This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.




- Environmental protection
- Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist.
- Check with your local authority or retailer for recycling advice.

### Name of Each Part

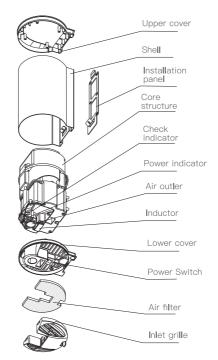

# **Electrical Diagram**




## Precautions before Installation

■ Do not install in the following places (Otherwise may cause malfunction).

- ·Place with temperature below -10 °C or over 40 °C
- ·Place directly sprinkled by water
- ·Place with direct sunlight, strong light
- ·Place easy for condensation
- ·Place filled with corrosive, oxidizing and reducing gas
- ·Place with altitude over the range of 0 ~ 2000m

#### ■Installation location

- •The following picture shows the recommended location.
- (If there is floor or obstacles below the unit, the distance between unit and floor or obstacles should be at least 400mm.)
- ·Keep the right side of unit away from mirror or wall, for the water droplets may splash out when you dry hands. (The distance should be 100mm above.)
- ·Please avoid the place easy to meet people and easy to encounter doors.
- ·Please select flat wall to install this product.

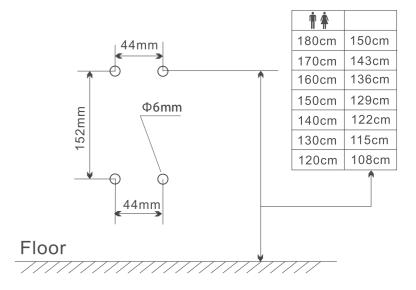

•Power cord should be 1.0mm<sup>2</sup>- 1.5mm<sup>2</sup>